



FLEXIBLE LED SCREEN



High
Brightness



Slim
Design




Easy
Maintenance




Quick
Installation

PRODUCT IMAGES

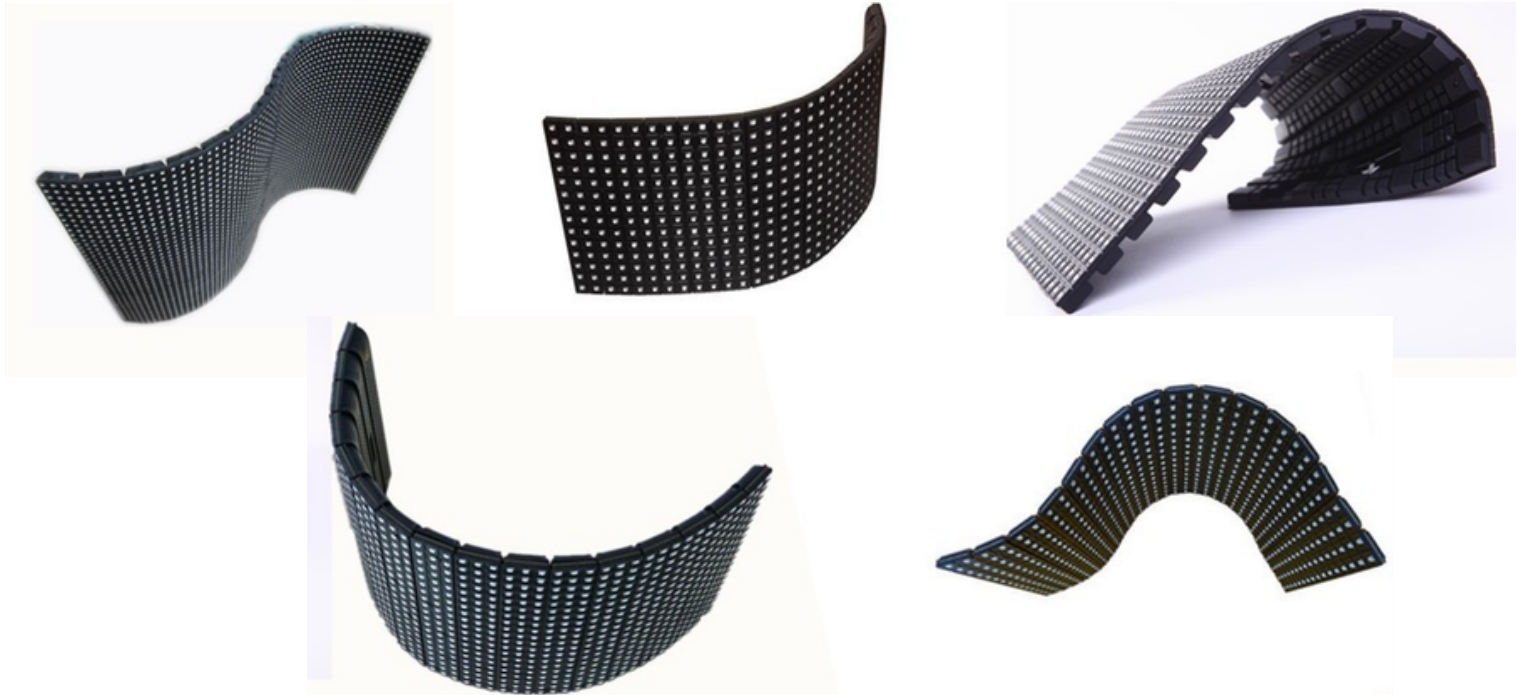


PRODUCT APPEARANCE


Front Panel

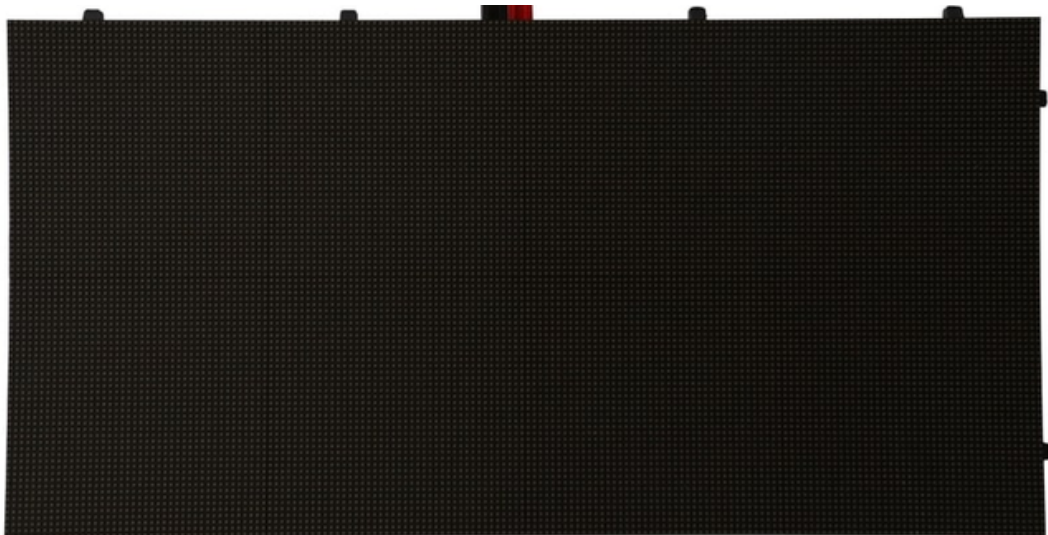

Rear Panel

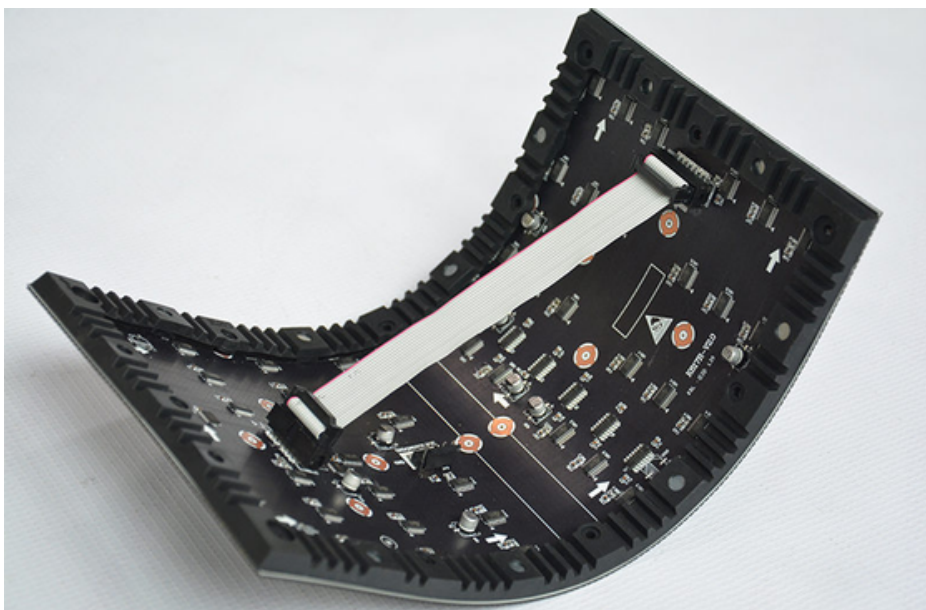

Uniformity color visual

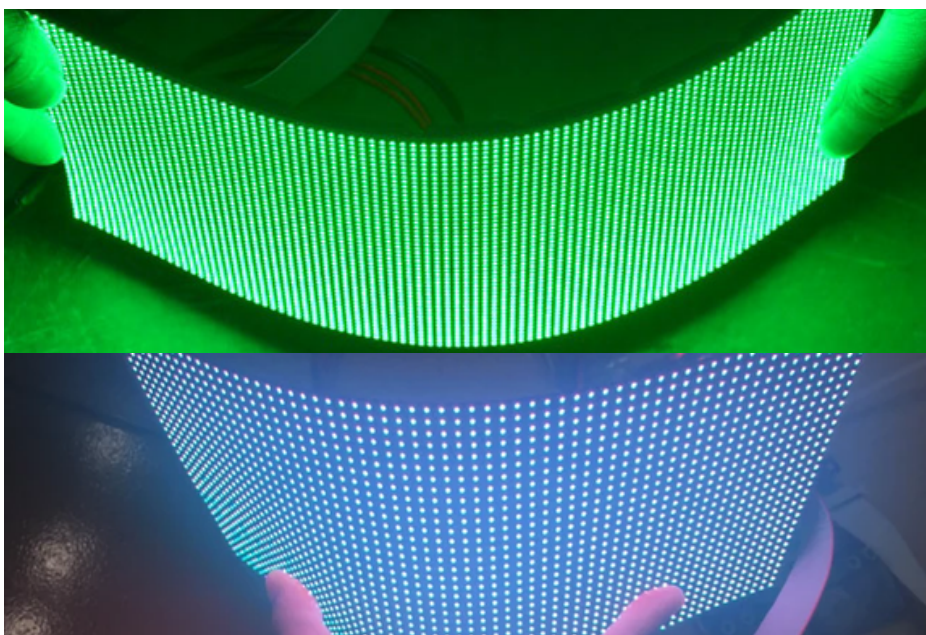

Bend Panel



PRODUCT FEATURES

- Ultra flexibility and soft for design any shape LED display.
- Can be any designed bend and swing to customized shape led screen
- Ultra thin, the thickness is only 90mm.
- Ultra light with only 75g without bottom frame and mask.
- Strong magnet inside for easy frontal service and maintain..

PRODUCT PARAMETERS

Pixel pitch	2.5mm	3mm	4mm	5mm
Pixel Structure	SMD 3in1	SMD 3in1	SMD 3in1	SMD 3in1
Pixel Density	240*120mm	240*120mm	256*128mm	320*160mm
Module Resolution	96*48dots	80*40dots	64*32dots	64*32dots
White Balance Brightness	≥3500cd/m ²	≥3500cd/m ²	≥3500/m ²	≥3500cd/m ²
Color Temperature	2000K—12500K	2000K—12500K	2000K—12500K	2000K—12500K
Frame Frequency	≥60Hz	≥60Hz	≥60Hz	≥60Hz
Refresh Frequency	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
Optimal Viewing Distance	≥2meters	≥3meters	≥4meters	≥5meters
Contrast	≥5000:1	≥5000:1	≥5000:1	≥5000:1
Grayscale	14Bit	14Bit	14Bit	14Bit
Continuous Working Time	≥72H	≥72H	≥72H	≥72H
Life Span	100,000H	100,000H	100,000H	100,000H
Protection Class	IP20	IP20	IP20	IP20
Operating Voltage	AC100/240V 50/60HZ	AC100/240V 50/60HZ	AC100/240V 50/60HZ	AC100/240V 50/60HZ
Maximum Power Consumption	700W/m ²	700W/m ²	700W/m ²	700W/m ²
Average Power Consumption	260W/m ²	260W/m ²	260W/m ²	260W/m ²